



Unit 2 Eldon Road
Industrial Estate,
Beeston,
Nottingham,
NG9 6DZ

0115 968 3540
sales@ksm.co.uk
www.ksm.co.uk

Cable Specification

C04-2Cxxx1NP/WH – CW1308 Internal Telephone Cable PVC
Telephone cable generally to CW1308 specification for connection of
telecommunication devices.

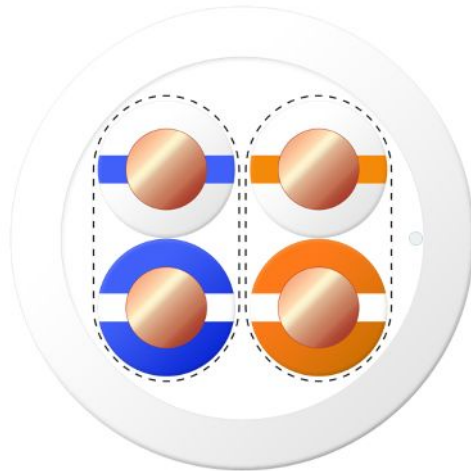


Image is for reference only. ©KSM Ltd

Mechanical Characteristics

Operating Temperature (°C): 0 to +80

Electrical Characteristics at 20°C

Conductor DC Resistance (Ω/km):	<154
Insulation DC Resistance ($\text{M}\Omega/\text{km}$):	>50
Test Voltage (V):	300

Compliance

RoHS II Directive (2011/65/EU & 2015/863)
REACH (1907/2006)

Part Options

C04-2C0021NP/WH	2 Pair CW1308 White PVC
C04-2C0031NP/WH	3 Pair CW1308 White PVC
C04-2C0041NP/WH	4 Pair CW1308 White PVC
C04-2C0061NP/WH	6 Pair CW1308 White PVC
C04-2C0101NP/WH	10 Pair CW1308 White PVC
C04-2C0251NP/WH	25 Pair CW1308 White PVC

Connectors, cable preparation tools and crimp
tools are also available.

Other colours and sheath options available on
request.

Higher pair counts and earthed cables available
on request.

Construction

Conductor

Material:	Bare Copper
Construction:	1/0.40mm

Insulation

Material:	Polyvinyl Chloride
Diameter:	1.00mm
Colour Code:	
2 Pair	White/Blue, White/Orange
3 Pair	as above + White/Green
4 Pair	as above + White/Brown
6 Pair	as above + White/Grey, Red/Blue
10 Pair	as above + Red/Orange, Red/Green, Red/Brown, Red/Grey
25 Pair	as above + Black/Blue, Black/Orange, Black/Green, Black/Brown, Black/Grey, Yellow/Blue, Yellow/Orange, Yellow/Green, Yellow/Brown, Yellow/Grey, Violet/Blue, Violet/Orange, Violet/Green, Violet/Brown, Violet/Grey

Sheath

Material:	Polyvinyl Chloride
Diameter:	
2 Pair	4.10mm
3 Pair	4.80mm
4 Pair	5.80mm
6 Pair	6.80mm
10 Pair	8.30mm
25 Pair	11.40mm

Important:

All information, including illustrations, are correct
at time of publishing. Users however should
independently evaluate the suitability of each
product for their particular application. KSM Ltd
makes no warranties as to the accuracy or
completeness of the information and disclaims any
liability regarding its use. Specifications are
subject to change without notice. In addition KSM
Ltd reserves the right to make changes, without
notification to the Buyer, to processing or materials
that do not affect compliance with any applicable
specification. All values are given as a nominal
representation. Copying of this information in
whole or part must be authorised in writing by
KSM Ltd and the information must only be used
for the purposes authorised. ©KSM Ltd.