



Unit 2 Eldon Road
Industrial Estate,
Beeston,
Nottingham,
NG9 6DZ

0115 968 3540
sales@ksm.co.uk
www.ksm.co.uk

Cable Specification

C15-2x129P/xx – 2 Core Figure 8 Lap Screened Cable
2 core figure 8 screened audio cable for interconnection of equipment.

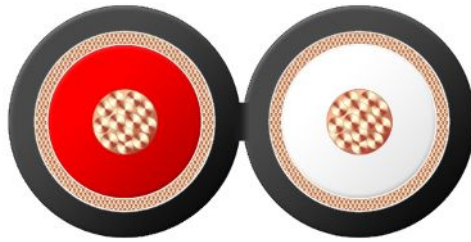


Image is for reference only. ©KSM Ltd

Compliance

RoHS Directive (2011/65/EU & 2015/863)
REACH (1907/2006)

Part Options

C15-23129P/BK	2 Core 13/0.10mm Lap Screened Black
C15-23129P/GY	2 Core 13/0.10mm Lap Screened Grey
C15-2Z129P/BK	2 Core 18/0.10mm Lap Screened Black

Construction

Conductor

Material:	Bare Copper
Construction:	
0.10mm ²	13/0.10mm
0.14mm ²	18/0.10mm

Insulation

Material:	Polyvinyl Chloride
Colour:	Red, White

2 x Individual Lap Screen

Material:	Bare Copper
Construction:	
0.10mm ²	32 x 0.10mm
0.14mm ²	51 x 0.10mm

Sheath

Material:	Polyvinyl Chloride
Diameter:	
0.10mm ²	2.70mm x 5.40mm
0.14mm ²	4.00mm x 8.00mm

Important:

All information, including illustrations, are correct at time of publishing. Users however should independently evaluate the suitability of each product for their particular application. KSM Ltd makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Specifications are subject to change without notice. In addition KSM Ltd reserves the right to make changes, without notification to the Buyer, to processing or materials that do not affect compliance with any applicable specification. All values are given as a nominal representation. Copying of this information in whole or part must be authorised in writing by KSM Ltd and the information must only be used for the purposes authorised. ©KSM Ltd.