



Unit 2 Eldon Road
Industrial Estate,
Beeston,
Nottingham,
NG9 6DZ

0115 968 3540
sales@ksm.co.uk
www.ksm.co.uk

Cable Specification

C15-3x12NP/CLR – 2 Core Figure 8 Transparent Speaker Cable
Cable for use as interconnecting wiring of speakers and audio equipment.

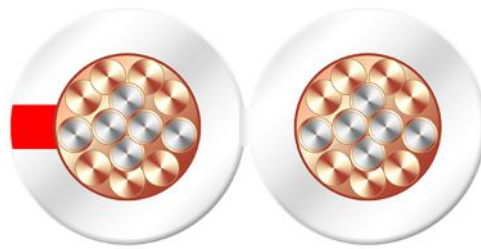


Image is for reference only. ©KSM Ltd

Construction

Conductor

Material: Copper/Copper Clad Aluminium

Construction:

	Cu Strands	CCA Strands
0.94mm ²	50 x 0.10mm	48 x 0.12mm
1.17mm ²	3x(21 x 0.10mm)	3x(20 x 0.12mm)
1.85mm ²	7x(15 x 0.10mm)	7x(13 x 0.12mm)
3.14mm ²	7x(24 x 0.10mm)	7x(23 x 0.12mm)

Sheath

Material: Polyvinyl Chloride

Diameter:

0.94mm ²	4.20mm x 8.20mm
1.17mm ²	4.50mm x 9.00mm
1.85mm ²	4.80mm x 9.60mm

Compliance

RoHS II Directive (2011/65/EU & 2015/863)
REACH (1907/2006)

Part Options

C15-3G12NP/CLR	0.94mm ² Figure 8 Clear/Red
C15-3H12NP/CLR	1.17mm ² Figure 8 Clear/Red
C15-3K12NP/CLR	1.85mm ² Figure 8 Clear/Red
C15-3L12NP/CLR	3.14mm ² Figure 8 Clear/Red

Important:

All information, including illustrations, are correct at time of publishing. Users however should independently evaluate the suitability of each product for their particular application. KSM Ltd makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Specifications are subject to change without notice. In addition KSM Ltd reserves the right to make changes, without notification to the Buyer, to processing or materials that do not affect compliance with any applicable specification. All values are given as a nominal representation. Copying of this information in whole or part must be authorised in writing by KSM Ltd and the information must only be used for the purposes authorised. ©KSM Ltd.