



Unit 2 Eldon Road
Industrial Estate,
Beeston,
Nottingham,
NG9 6DZ

0115 968 3540
sales@ksm.co.uk
www.ksm.co.uk

Cable Specification

C15-8Y31NL/CY – 4 Core 16AWG Speaker Cable Cyan LSF
Highly flexible cable for use in home and commercial audio installations.

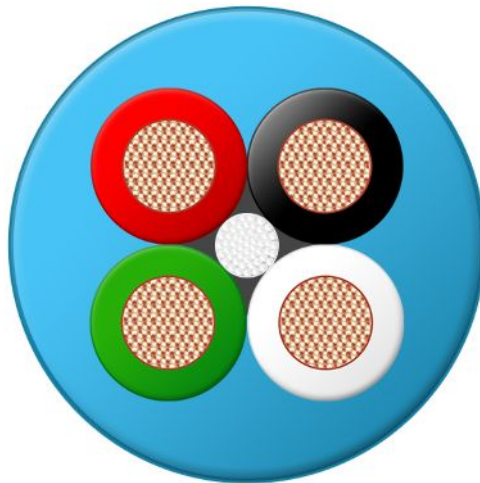


Image is for reference only. ©KSM Ltd

Construction

Conductor

Material: Bare Copper
Construction: 65/0.16mm (16 AWG)

Insulation

Material: Polyethylene
Diameter: 2.15mm
Colour Code: Red, Black, Green, White

Sheath

Material: Low Smoke & Fume
Diameter: 7.20mm

Mechanical Specifications

Operating Temperature (°C): 0 to +60

Electrical Specifications at 20°C

Conductor DC Resistance ($\Omega/100m$): ≤ 1.59
Insulation DC Resistance ($M\Omega \cdot M$): ≥ 200
Test Voltage (V): 300

Compliance

RoHS II Directive (2011/65/EU & 2015/863)
REACH (1907/2006)

Part Options

C15-8Y31NL/CY | 4 Core 16 AWG Cyan LSF

Important:

All information, including illustrations, are correct at time of publishing. Users however should independently evaluate the suitability of each product for their particular application. KSM Ltd makes no warranties as to the accuracy or completeness of the information and disclaims any liability regarding its use. Specifications are subject to change without notice. In addition KSM Ltd reserves the right to make changes, without notification to the Buyer, to processing or materials that do not affect compliance with any applicable specification. All values are given as a nominal representation. Copying of this information in whole or part must be authorised in writing by KSM Ltd and the information must only be used for the purposes authorised. ©KSM Ltd.